
PRECISION BOLTING FOR OVER **20 YEARS**



**LIGHTER
FASTER
STRONGER**

PRODUCT CATALOGUE



RAD TORQUE SYSTEMS



RAD SINGLE SPEED



DB-RAD BATTERY SERIES



RAD TV SERIES



Precision Bolting for

TABLE OF CONTENTS

COMPANY PROFILE	4
RAD PNEUMATIC SERIES	5
RAD Single Speed	6
RAD High Speed	7
RAD Transducer Verification	8
Wheel Nut Bolting & OTR Mining	9
E-RAD BLU SERIES	10
E-RAD BLU	11
E-RAD BLU Touch Control Case	11
B-RAD BATTERY SERIES	12
B-RAD Select	13
Digital B-RAD	14
V-RAD ELECTRIC SERIES	15
V-RAD Select	16
Digital V-RAD	17
AUDIT EQUIPMENT	18
RAD Smart Sockets™	19
RAD Calibration Systems	20
ACCESSORIES	21
RAD Safety Accessories	22
Reaction Arms	22
Nose Extensions	23
Regulator and Tool Holder	23
PRODUCT REFERENCE CHART	24

over 20 Years

COMPANY PROFILE



Welcome to RAD Torque Systems. We are the leading Canadian manufacturer of extreme torque equipment, which includes pneumatic, battery powered, and electronic pistol grip torque wrenches. With more than 21 years in the industry, we're proud to say that we're Canadian owned and operated. We manufacture all of our tools in Abbotsford, BC, which gives us greater control over every piece that goes into our products. We don't just give you a great tool; we ensure its quality from conception through to production and even years after its initial use. The RAD Torque Systems philosophy has proven to be successful all over the world in such industries as oil & gas, petrochemical, mining, aerospace, power generation and manufacturing.

Our parent company, New World Technologies Inc., continues to invest in and employ the latest technology to achieve the highest level of innovation, quality, and performance - which has resulted in multiple patents. New World's extensive in-house machining facilities ensure maximum flexibility and responsiveness enabling quick deliveries and customer satisfaction.

RAD TORQUE SYSTEMS:

- 14 CNC Machining Centers (Okuma and HAAS Systems)
- 10 Gear Cutting Machines (Working to AGMA Standards)
- CAD and CAM Processing (Solid Works and Master Cam)
- 10 Professional Engineers (Mechanical and Electronics)
- Multiple Offices & Worldwide Distribution
- ISO 17025 Accreditation (Cert # L-2325 Calibration)
- Built for Maximum Flexibility and Responsiveness
- New Research & Development Facility (Phantom Works)

New World Technologies Inc is an
ISO 17025 accredited calibration laboratory.



RAD PNEUMATIC SERIES



All RAD Pneumatic tools include:

- Reaction arm & retaining ring
- Tool holder with FRL unit, 12' hose and fittings
- Safety instruction and operators manual on USB Flash Drive
- Calibrated to ISO 17025 standards



PATENTED TECHNOLOGY
PRECISION DESIGN
LIGHTWEIGHT + ERGONOMIC

RAD SINGLE SPEED


**Extreme duty torque wrenches for heavy duty applications!
Also available with built-in transducers - visit the RAD TV Series!**

More than 20 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes - RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide, RAD Single Speed torque wrenches offer:

- The ultimate in power-to-weight ratio
- Wide torque range to suit multiple applications
- Unmatched reliability delivered by one of the most advanced engineered gear boxes on the market
- Controlled torque - accuracy of +/- 4% and repeatability of +/- 2%

FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

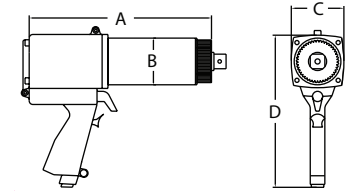

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	NOISE LEVEL	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH							
13573	475SL	0.75"	68	475	65	2.7	80 db	167.6	61.0	69.9	222.3
13539	10GX-M	0.75"	136	949	30	3.6	80 db	228.6	63.5	69.9	228.6
13549	14GX-M	0.75"	271	1,356	20	3.6	80 db	207.0	63.5	69.9	205.0
19135	20DX-M	1.0"	407	2,034	10	3.9	80 db	203.2	68.6	69.9	205.7
13565	34GX-M	1.0"	678	3,390	9	6.1	85 db	246.4	78.7	83.8	241.3
24717	40DX-M	1.0"	1,220	4,068	8	6.7	85 db	254.0	81.3	83.8	241.3
13571	46GX-M	1.0"	1,356	4,610	12	9.0	85 db	317.5	86.4	94.0	274.3
26133	70DX-M	1.5"	2,034	6,780	6.7	10.6	85 db	285.8	95.3	95.3	264.2
15805	80DX-M	1.5"	2,712	8,136	6.6	12.4	85 db	348.0	101.6	101.6	276.9
23299	110DX-M	1.5"	3,390	10,848	4	13.7	85 db	308.6	108.0	108.0	270.5
13547	115GX-M	1.5"	4,068	11,526	4.5	17.3	85 db	431.8	114.3	114.3	279.4
26153	150DX-M	1.5"	5,424	14,916	3	18.9	85 db	353.1	127.0	127.0	281.2

RAD HIGH SPEED


Extreme duty torque wrenches with high RPM productivity

RAD High Speed torque wrenches incorporate a precision-engineered high-speed gearbox designed for faster run down and quick reaction point positioning on time sensitive bolting applications.

- The two-speed models feature a unique full automatic gearbox design, eliminating the time consuming switch between high and low speed gear.

FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

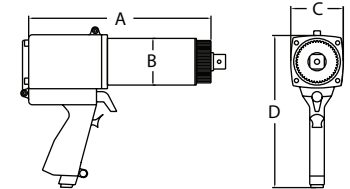

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	NOISE LEVEL	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH							
19774	14GX-2	0.75"	475	1,356	85	4.5	80 db	261.6	63.5	69.9	205.7
19775	20DX-2	1.0"	678	2,034	50	4.7	80 db	251.5	68.6	69.9	205.7
19776	34GX-2	1.0"	949	3,390	44	7.5	80 db	304.8	78.7	83.8	254.0

Accuracy of +/-4%, Repeatability of +/-2%

RAD TRANSDUCER VERIFICATION

RAD Pneumatic torque wrench with a built in transducer for verification and traceability! With strain gauge technology, you can record every bolt cycle.


The RAD Transducer Verification (TV) solves an ongoing problem in the bolting industry: incorrect air supply and wrong tool operation can cause differences in torque output of your tools. With RAD's TV wrench, the operator gets a clear visual indication whether the actual torque is deviating from the set target torque, therefore reducing errors in the bolting process. At the same time very high torque accuracy can be achieved when using the real time Bluetooth torque-graphing mode.

- Easy data logging and collection
- Pass or Fail indicator light on the tool
- Bluetooth connectivity to your smart phone or tablet
- Controlled torque - accuracy of +/-1% on transducer



FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

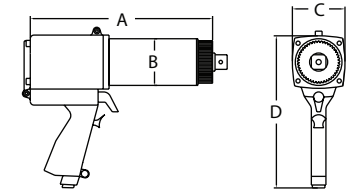

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	NOISE LEVEL	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH							
22017	10GX-R TV	0.75"	407	949	30	5.4	80 db	317.5	63.5	69.9	228.6
22079	14GX TV	0.75"	271	1,356	20	3.6	80 db	241.3	63.5	69.9	205.0
22887	20DX TV	1.0"	407	2,034	10	3.9	80 db	233.7	68.6	69.9	205.7
22018	46GX TV	1.0"	1,356	4,610	12	9.0	85 db	342.9	86.4	94.0	266.7

RAD WHEEL NUT & OTR MINING

Accidents caused by incorrectly tightened wheel nuts are a serious problem. That's why the RAD Wheel Nut Bolting was designed with one job in mind: wheel nut bolting where torque control is a must.


RAD planetary gear torque wrenches are vibration free and have the accuracy to prevent accidental under- and over-tightening. The nose extensions are ideal for reaching wheel nut studs that are recessed and have tight clearances.

- Removable custom reaction arms designed to fit on virtually any wheel configuration
- Extended reaction point for safe and quick operation
- Accuracy to ensure correct tightened wheels



The nose extension (-R) Developed exclusively for extreme duty maintenance of mining haul trucks from 50-400 ton capacities and front-end loaders. The extended nose allows safe access of virtually all wheel configurations found on today's heavy equipment.

The nose extension kit (-NX) Designed with flexibility in mind. Complete with 3 different reaction arms and a nose extension for hard-to-reach areas, the NX Kit is a "go anywhere" tool capable of a variety of applications but especially suitable for off-road construction equipment.

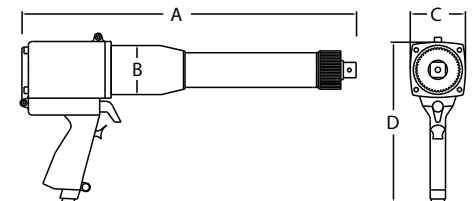

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	NOISE LEVEL	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)	DIMENSION E(mm)
			LOW	HIGH								
13541	10GX-R	0.75"	407	949	115	5.4	80 db	368.3	63.5	50.8	69.9	228.6
14550	14GX-NX	0.75"	271	1,356	20	3.6	80 db	207.0	63.5	n/a	69.9	205.0
20809	20NDX-R	1.0"	407	2,034	10	7.2	80 db	542.3	68.6	68.6	69.9	203.7
19340	20DX-NX	1.0"	407	2,034	10	3.9	80 db	203.2	68.6	n/a	69.9	205.7
13563	2400NGX-R	1.0"	678	2,441	10	12.4	85 db	546.1	76.2	50.8	83.8	241.3

Accuracy of +/-4%, Repeatability of +/-2%

E-RAD BLU SERIES



All E-RAD BLU Tool Kits Include:

- Reaction arm & retaining ring
- E-RAD Tool Handle
- E-RAD Touch Controller
- Single 15' Cable
- Calibrated to ISO 17025



ADVANCED ELECTRONICS
HIGH DEGREE OF ACCURACY
DATA COLLECTION

E-RAD **BLU**

Ability to use different handles per controller case!


The system of choice for the wind industry, the E-RAD BLU precision torque wrench tools are designed to provide a high degree of accuracy (+/- 2.8%) and repeatability (+/- 2%). Using a patented gearbox design and the precision of an electric AC Servo motor, these tools deliver smooth continuous torque. Best of all, it's the most affordable system on the market.



E-RAD BLU TOUCH CONTROL CASE

The touch screen control case provides an easy to use interface that allows for pre-selectable presets, quick error-free torque and angle adjustments, complete recalibrations as well as data logging everything for easy export into spreadsheets on your laptop.

RAD SMART SOCKETS™ can connect to the E-RAD BLU tool via Bluetooth technology. This combination allows you to automatically calibrate your E-RAD BLU to any joint!

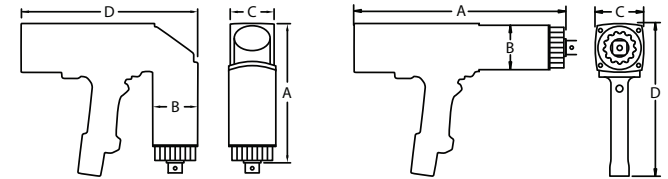

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH						
21985	ERAD BLU 950-M	0.75"	136	949	20	5.4	336.6	63.5	76.2	209.6
24162	ERAD BLU 2000-M	1.0"	271	2,034	8	5.9	337.3	68.6	76.2	209.6
21986	ERAD BLU 3400-COMP	1.0"	339	3,390	5.5	8.1	375.9	76.2	76.2	209.6
22434	ERAD BLU 3400-M-90 Degree	1.0"	339	3,390	6	8.1	245.1	76.2	78.7	209.6
21987	ERAD BLU 4000-M	1.0"	678	4,068	5.5	10.6	425.5	86.4	88.9	222.3
21988	ERAD BLU 8000-M	1.5"	2,034	8,136	4	13.1	419.1	101.6	88.9	222.3
21989	ERAD BLU 10K-M	1.5"	2,034	10,170	1.5	14.9	431.8	108.0	108.0	232.2

B-RAD BATTERY SERIES



Each B-RAD Battery Series Tool Includes:

- Reaction arm and retaining ring
- Charger and two 18V batteries
- Weatherproof storage case
- Calibrated to ISO 17025 standards
- Safety instructions on USB Flash Drive
- Operators Manual




WORLD'S FIRST DIGITAL
BATTERY POWERED
TORQUE WRENCH

B-RAD **SELECT**

NEW! Now with digital torque settings.
Torque ranges up to 3,000 ft. lbs!

The newly designed B-RAD Select offers unmatched power, versatility, and reliability while incorporating a new torque display with buttons. The B-RAD Select allows the user to easily select the target torque. Patented Product.

- Now with digital torque settings, able to increase or decrease the value by 10 ft. lbs
- Torque ranges up to 3,000 ft. lbs
- Equipped with the latest lithium-ion technology
- Suitable for pre-torque and service jobs where electricity or compressed air are not available



PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (Nm)		RPM	WEIGHT (Kg)	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH						
24507	TOOL KIT BRAD SELECT 700	0.75"	170	678	13	3.4	235.0	63.5	67.3	260.4
24508	TOOL KIT BRAD SELECT 700-2	0.75"	203	678	58	4.1	285.8	63.5	67.3	260.4
24509	TOOL KIT BRAD SELECT 1400	0.75"	271	1,356	6	3.7	254.0	63.5	67.3	260.4
24510	TOOL KIT BRAD SELECT 1400-2	0.75"	271	1,356	20	4.5	301.8	63.5	67.3	260.4
24511	TOOL KIT BRAD SELECT 2000	1.0"	407	2,034	9.2	4.0	247.7	68.6	68.6	260.4
24512	TOOL KIT BRAD SELECT 2000-2	1.0"	407	2,034	18	4.8	330.2	68.6	68.6	260.4
25031	TOOL KIT BRAD SELECT 4000	1.0"	814	4,068	2	5.9	279.4	81.3	81.3	260.4
24929	TOOL KIT BRAD SELECT 4000-2	1.0"	814	4,068	13	7.3	411.5	336.6	81.3	260.4


Accuracy of +/-5%, Repeatability of +/-2%

DIGITAL B-RAD

**Ideal for applications where compressed air is not available!
Up to 2 times faster than previous version!**

Digital B-RAD powered torque wrenches are the world's first digital, cordless, and lithium-ion battery tool on the market. With advanced patented technology containing digital display and single increment torque settings.

- Programmable Preset Torque Settings
- Latest lithium-ion 18V battery technology
- High accuracy of +/-5%
- Automatic 2-speed gearbox
- Patented Product



PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
22876	DB-RAD 700-2	0.75"	136	678	59	5.0	80 db	321.8	63.5	63.5	260.4
22878	DB-RAD 1400-2	0.75"	339	1,356	19	5.2	80 db	330.2	63.5	63.5	260.4
22880	DB-RAD 2000-2	1.0"	678	2,034	17	5.3	80 db	330.2	68.6	63.5	260.4

V-RAD ELECTRIC SERIES



All V-RAD Electric Series Tool Includes:

- Reaction arm & retaining ring
- Weatherproof storage case
- Safety instructions and operators manual on USB Flash Drive
- Calibrated to ISO 17025 standards




LIGHTWEIGHT + COMPACT
ELECTRIC POWERED
TORQUE WRENCH

V-RAD SELECT

**Quick adjust torque settings.
Equal power in forward and reverse.**

V-RAD Select is a new generation of electric torque wrenches used for the installation or removal of heavy duty fasteners where accuracy, power, and safety are required. Quick adjust torque settings. Equal power in forward and reverse.

- Now with digital torque settings, able to increase old decrease the value by 10 ft.lbs
- Torque ranges up to 3,000 ft.lbs
- Available in both 120V or 230V




PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (Nm)		RPM	WEIGHT (Kg)	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH						
13589	TOOL KIT VRAD 700	0.75"	68	678	9.5	4.3	321.3	63.5	69.9	219.7
13583	TOOL KIT VRAD 1400	0.75"	136	1,356	5.5	5.0	321.3	63.5	69.9	219.7
13585	TOOL KIT VRAD 2000	1.0"	203	2,034	5.5	5.4	342.9	63.5	69.9	219.7
13587	TOOL KIT VRAD 3400	1.0"	339	3,390	3.5	6.1	379.7	63.5	69.9	219.7

DIGITAL V-RAD

Electric Powered

Digital V-RAD torque wrenches are the extreme design innovation with fully programmable preset torque settings with torque range up to 2500 ft. lbs. Smooth continuous flow of controlled torque with single increment torque settings.

- Digital display with colour screen
- Single increment digital torque settings
- Multilevel password protection
- Electronic bolt counter
- Patented legendary gearbox design
- “Pass/Fail” function
- Available in 110V and 220V version

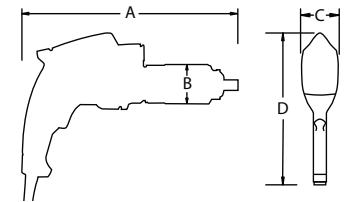

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE(Nm)		RPM	WEIGHT (Kg)	NOISE LEVEL	DIMENSION A(mm)	DIMENSION B(mm)	DIMENSION C(mm)	DIMENSION D(mm)
			LOW	HIGH							
16123	DV-RAD 1400	0.75"	542	1,356	7.7	5.1	80 db	321.6	63.5	69.9	219.7
16124	DV-RAD 2000	1.0"	814	2,034	5.8	5.4	80 db	342.9	68.6	69.9	219.7
16125	DV-RAD 3400	1.0"	1,356	3,390	3.2	6.1	80 db	379.7	78.7	69.9	219.7

Accuracy of +/-5%, Repeatability of +/-2%

RAD AUDIT EQUIPMENT



All RAD Smart Sockets™ Include:

- Weatherproof storage case
- Plug & USB cord
- Calibration certificate to ISO 17025



INSTANT TORQUE
READ-OUT
REVOLUTIONARY

RAD SMART SOCKETS™

Instant torque read-out of your live application!
Strain gauge technology measures torque applied to bolt. Patented Product.

The RAD Smart Sockets™ use RAD Torque’s transducer technology combined with a custom socket to measure the actual torque applied to the bolt during a torque cycle. By innovative design, the Smart Sockets™ is no larger than a standard socket. Its compact size and innovative technology makes the Smart Sockets™ a perfect audit tool for inspecting bolted joints and it can function as a master calibration for various torque tools.

- Measures and displays peak torque
- Full data collection - export to email by PDF, XLS, CSV
- View in real time via Bluetooth onto your smartphone or tablet
- Transducer accuracy of +/-1%



PART NUMBER	SMART SOCKET MODEL	TORQUE (FT.)		DRIVE SIZE	WEIGHT (Kg)	DIMENSION	
		LOW	HIGH			HEIGHT	DIAMETER
20879	33mm SMART SOCKET™	150	1500	3/4"	2.65	3.94"	2.83"
21363	36mm SMART SOCKET™	150	1500	1"	2.65	3.94"	2.83"
22158	41mm SMART SOCKET™	150	1500	1"	2.65	3.42"	2.83"
20880	46mm SMART SOCKET™	150	1500	1"	2.65	3.42"	2.83"
20881	50mm SMART SOCKET™	300	3000	1"	3.20	3.50"	3.40"
20882	55mm SMART SOCKET™	300	3000	1"	3.20	3.50"	3.40"
20883	60mm SMART SOCKET™	300	3000	1"	3.20	3.50"	3.40"
20394	65mm SMART SOCKET™	800	8000	1"	8.7	4.75"	4.53"
20884	70mm SMART SOCKET™	800	8000	1.5"	8.7	4.75"	4.53"
20885	80mm SMART SOCKET™	800	8000	1.5"	8.7	4.75"	4.53"
25657	90mm SMART SOCKET™	1200	12000	1.5"	12.8	5.15"	4.53"
25658	100mm SMART SOCKET™	1200	12000	1.5"	15.9	5.75"	4.73"

RAD CALIBRATION SYSTEMS

The RAD Calibration Systems have earned their place in calibration laboratories worldwide because of their high accuracy and repeatability.

- Ranges up to 7,000 ft. lbs
- On-screen Calibration software allows for convenient reading
- Connect to RAD Calibration Software via your computer or tablet
- Up to 1,500 ft. lbs classified to BS 7882:2008 as Class 1 or better for the primary range ($\pm 0.5\%$ of reading from 20% to 100% of full scale)
- Backward compatible with previous RAD calibration benches.



PART NUMBER	DESCRIPTION	TORQUE (FT.)		DRIVE SIZE	WEIGHT (Kg)	DIMENSION A	DIMENSION B	DIMENSION C
		LOW	HIGH					
23442	RAD 1500 TRANSDUCER	75	1500	1.0"	4.0	5.6"	2.35"	2.7"
23443	RAD 3500 TRANSDUCER	175	3500	1.5"	10.0	6.75"	2.5"	4.0"
23444	RAD 7000 TRANSDUCER	350	7000	1.5"	11.0	6.75"	2.5"	4.0"

ACCESSORIES



LEADING THE
BOLTING INDUSTRY
IN SAFETY

RAD SAFETY ACCESSORIES

Ergonomics and safety are very important during the design phase of any new RAD tool. In addition to making the job more ergonomic and safe, we want our tools to be easy to use, powerful, accurate and very reliable. RAD believes safety features should not impede workplace efficiency and speed, but should make workers aware of the risks involved in working with powerful tools. RAD has developed a range of ergonomic and safety enhancing features.

Ergonomic features:

- RAD's patented planetary gear reduction drive system delivers 88 times less vibration than impact wrenches.
- No risk of HAVS injuries (Hand-Arm-Vibration-Syndrome). Lower risk than impact wrenches.
- Pistol grip trigger/control reduces operator error.
- RAD's low profile reaction arm eliminates all operational load on the operator.

Hand Guards



Trigger Guard



Reaction Arms




RAD REACTION ARMS

Each RAD tool includes a standard reaction arm. In addition to this, you can order the below special reaction arms to ensure correct reaction for different applications. Please consult our website for dimensions and part numbers.

Standard Reaction Arm



Deep Socket Reaction Arm



Double Ended Reaction Arm



REGULATOR & TOOL HOLDER

Carrying your RAD Pneumatic tool around from job to job?
Introducing the new Tool Holder.

We decided to continue our quest for improved ergonomics by not only engineering the world's lightest pneumatic torque wrenches with the highest power-to-weight ratio in the industry, but also by developing the industry's most ergonomic tool holder.

- Offset handle allows for balanced carrying when the tool is stored in the storage pocket.
- Accessory pocket (6"x 6") allows for quick and easy access to additional accessories such as custom reaction arms, snap rings and sockets.
- High-density polypropylene construction means the tool holder will stand up to the most demanding conditions while remaining lightweight for easy portability.
- Lightweight - only 4lbs
- Torque chart holder for quick reference
- Comes Complete With FRL and House Assembly



RAD NOSE EXTENSIONS

Available for most RAD models. Please
contact us for custom inquiries.



PRODUCT REFERENCE CHART



PNEUMATIC SERIES: RAD SINGLE SPEED

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
12316	350SL	0.75"	50-350 ft/lbs.	65	6.0 lbs.
12814	7GX	0.75"	100-700 ft/lbs.	30	8.0 lbs.
12818	10GX	0.75"	200-1000 ft/lbs.	20	8.0 lbs.
17328	15DX	1.0"	300-1500 ft/lbs.	10	8.6 lbs.
12377	25GX	1.0"	500-2500 ft/lbs.	9	13.5 lbs.
22238	30DX	1.0"	900-3000 ft/lbs.	8	14.8 lbs.
12356	34GX	1.0"	1000-3400 ft/lbs.	12	20.0 lbs.
20248	50DX	1.5	1500-5000 ft/lbs.	6.7	23.5 lbs.
15328	60DX	1.5"	2000-6000 ft/lbs.	6.6	27.6 lbs.
18558	80DX	1.5"	2500-8000 ft/lbs.	4	30.5 lbs.
21984	85GX	1.5"	2500-8000 ft/lbs.	4.5	38.5 lbs.
26152	110DX	1.5"	4000-11000 ft/lbs.	3	42.0 lbs.

PNEUMATIC SERIES: RAD HIGH SPEED

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
10644	10GX-2	0.75"	350-1000 ft/lbs.	85	9.9 lbs.
17068	15DX-2	1.0"	500-1500 ft/lbs.	50	10.5 lbs.
19773	25GX-2	1.0"	700-2500 ft/lbs.	44	16.6 lbs.

PNEUMATIC SERIES: RAD TV

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
21953	7GX-R TV	0.75"	300-700 ft/lbs.	30	12 lbs.
22076	10GX TV	0.75"	200-1000 ft/lbs.	20	8.0 lbs.
22885	15DX TV	1.0"	300-1500 ft/lbs.	10	8.6 lbs.
21357	34GX TV	1.0"	1000-3400 ft/lbs.	12	20 lbs.

PNEUMATIC SERIES: WHEEL NUT & OTR MINING

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
13495	7GX-R	0.75"	300-700 ft/lbs.	115	12.0 lbs.
13691	10GX-NX	1.0"	200-1000 ft/lbs.	20	8.0 lbs.
20810	15NDX-R	1.0"	300-1500 ft/lbs.	10	16.0 lbs.
19339	15DX-NX	1.0"	300-1500 ft/lbs.	10	8.6 lbs.
13477	1800NGX-R	1.0"	500-1800 ft/lbs.	10	27.5 lbs.

ELECTRONIC SERIES - E-RAD BLU

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
21980	E-RAD BLU 700	0.75"	100-700 ft/lbs.	20	12.0 lbs.
24161	E-RAD BLU 1500	1.0"	200-1500 ft/lbs.	8	13.0 lbs.
21981	E-RAD BLU 2500 COMP	1.0"	250-2500 ft/lbs.	5.5	18.0 lbs.
24221	E-RAD BLU 2500 COMP 90	1.0"	250-2500 ft/lbs.	6	18.0 lbs.
21982	E-RAD BLU 3000	1.0"	500-3000 ft/lbs.	5.5	23.5 lbs.
21983	E-RAD BLU 6000	1.5"	1500-6000 ft/lbs.	4	29.0 lbs.
21984	E-RAD BLU 7500	1.5"	1500-7500 ft/lbs.	1.5	33.0 lbs.

BATTERY SERIES: B-RAD SELECT

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
24501	B-RAD 500 SELECT	0.75"	125-500 ft/lbs.	13	8.4 lbs.
24502	B-RAD 500-2 SELECT	0.75"	150-500 ft/lbs.	58	10.4 lbs.
24503	B-RAD 1000 SELECT	0.75"	200-1000 ft/lbs.	6	8.8 lbs.
24504	B-RAD 1000-2 SELECT	0.75"	200-1000 ft/lbs.	20	10.8 lbs.
24505	B-RAD 1500 SELECT	1.0"	300-1500 ft/lbs.	4	9.2 lbs.
24506	B-RAD 1500-2 SELECT	1.0"	300-1500 ft/lbs.	18	11.2 lbs.
24281	B-RAD 3000 SELECT	1.0"	600-3000 ft/lbs.	2	13.0 lbs.
24928	B-RAD 3000-2 SELECT	1.0"	600-3000 ft/lbs.	13	16.2 lbs.

BATTERY SERIES: DIGITAL B-RAD

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
21779	DB-RAD 500-2	0.75"	100-500 ft/lbs.	59	11.0 lbs.
21783	DB-RAD 1000-2	0.75"	250-1000 ft/lbs.	19	11.6 lbs.
21787	DB-RAD 1500-2	1.0"	500-1500 ft/lbs.	17	11.8 lbs.

ELECTRIC SERIES: DIGITAL V-RAD

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
16120	DV-RAD 1000	0.75"	400-1000 ft/lbs.	7.7	11.4 lbs.
16121	DV-RAD 1500	1.0"	600-1500 ft/lbs.	5.8	12.0 lbs.
16122	DV-RAD 2500	1.0"	1000-2500 ft/lbs.	3.2	13.6 lbs.

ELECTRIC SERIES: V-RAD SELECT


PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
25627	V-RAD SELECT 500	0.75"	50-500 ft/lbs.	9.5	9.5 lbs.
25628	V-RAD SELECT 1000	0.75"	100-1000 ft/lbs.	5.5	11 lbs.
25629	V-RAD SELECT 1500	1.0"	150-1500 ft/lbs.	5.5	12 lbs.
25630	V-RAD SELECT 2500	1.0"	250-2500 ft/lbs.	3.5	13.5 lbs.




RAD SINGLE SPEED



E-RAD BLU

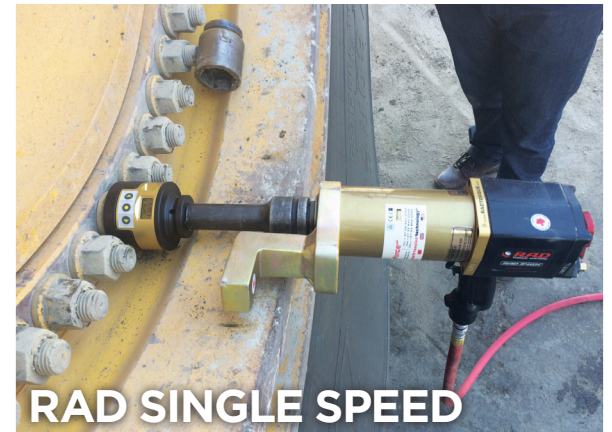

RAD SINGLE SPEED

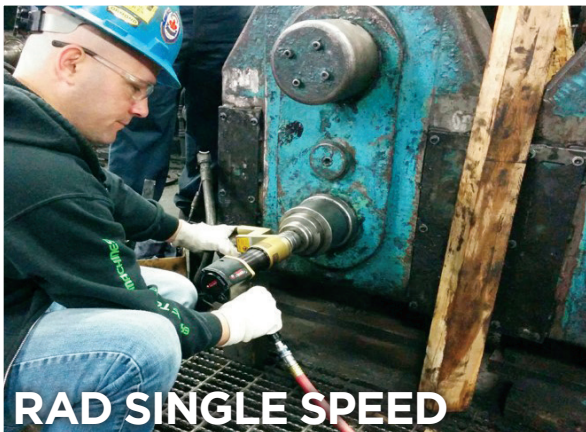

RAD SINGLE SPEED




RAD SINGLE SPEED



B-RAD SELECT

RAD TORQUE SYSTEMS

MINING
OIL + GAS
AEROSPACE
PETROCHEMICAL
MANUFACTURING

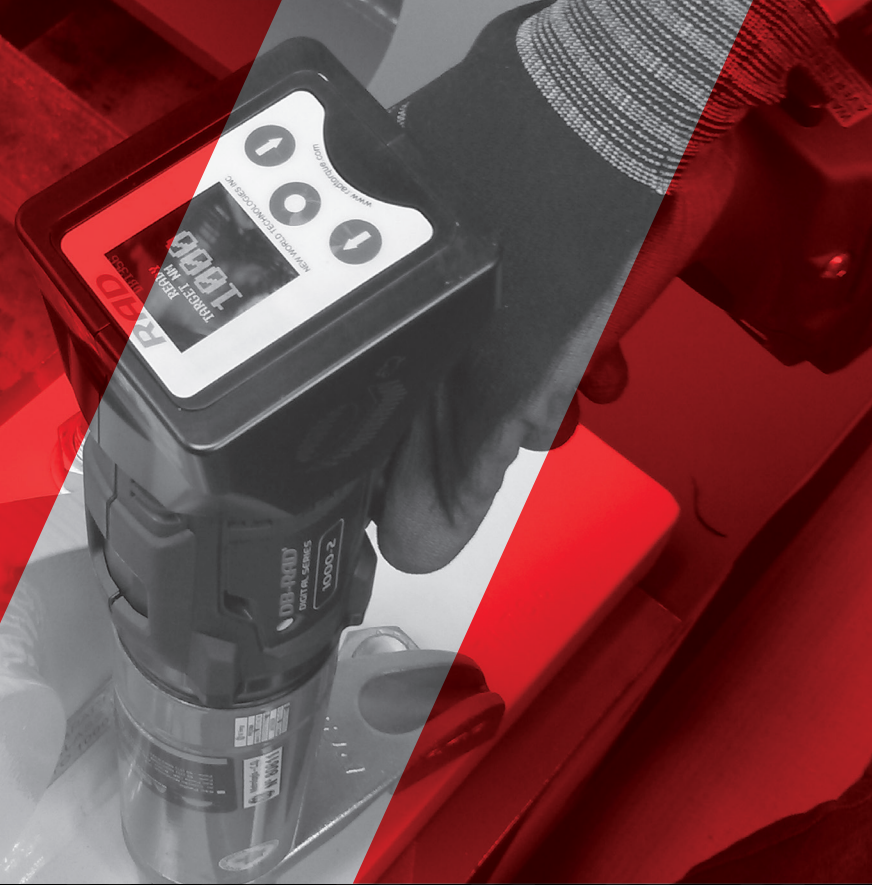

LABORATORY ACCREDITATION BUREAU
a division of AS4
ACCREDITED ISO/IEC 17025
Certificate # L2325 Calibration



NEW WORLD TECHNOLOGIES INC

30580 PROGRESSIVE WAY | ABBOTSFORD, BC V2T 6Z2 | CANADA

RADTORQUE.COM